


Gyproc® X20 can be used on walls, as well as ceilings with 24”(610 mm) o.c. frame spacing (perpendicular to framing) when water-based texture is applied.



Product Data

Thickness	Metric (mm)	10 mm
Edge Details:	Recessed Edge	Yes
	Square Edge	Yes
Width (mm):	1220	
Length (mm):	2440	
Weight:	10 mm = 7.0kg/m ²	
Product Standard:	TIS 219-2552	

Thickness : 10 mm | Dimension : 1220 x 2440 mm | Edge Type : Recessed Edge
Standard : TIS 219-2552, ASTM C1396, BS EN 520

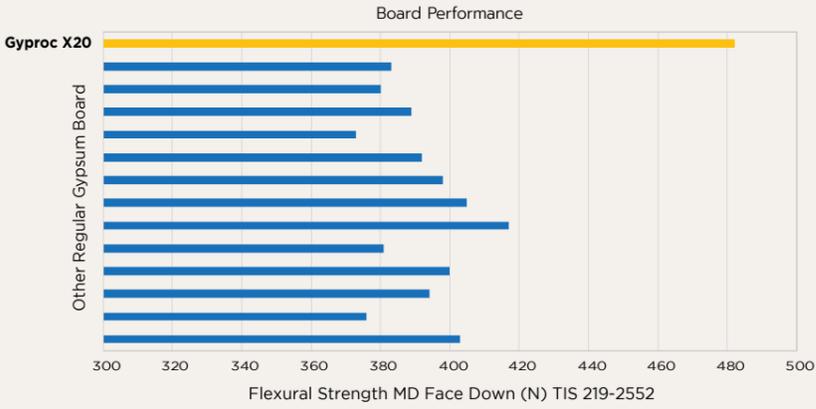

20% stronger than regular gypsum board (conformed to TIS 219-2552 & ASTM C1396)



Written enquiries should be addressed to:
Thai Gypsum Products Pcl.
 Gypsum Metropolitan Tower
 539/2 Si Ayutthaya Road,
 Thanon Phayathai, Ratchathewi,
 Bangkok 10400 Thailand
 Tel: +66(2) 700-9300



Gyproc® X20 Gypsum Board

X Series : A New Generation of Gypsum Board



STRONGER

HEALTHIER

Gyproc X20 Gypsum Board
 Gyproc SAINT-GOBAIN
 The Gypsum Products PCL Gypsum Metropolitan Tower 539/2 Si Ayutthaya Road Thanon Phayathai Ratchathewi Bangkok 10400 Thailand
 Tel: +66(0)2 700 9300
 E-mail: sac.thailand@gyproc.com www.gyproc.co.th



Gyproc® X20

INNOVATIVE



STRONGER



HEALTHIER



TIS 219-2552



