


BIOPLUS

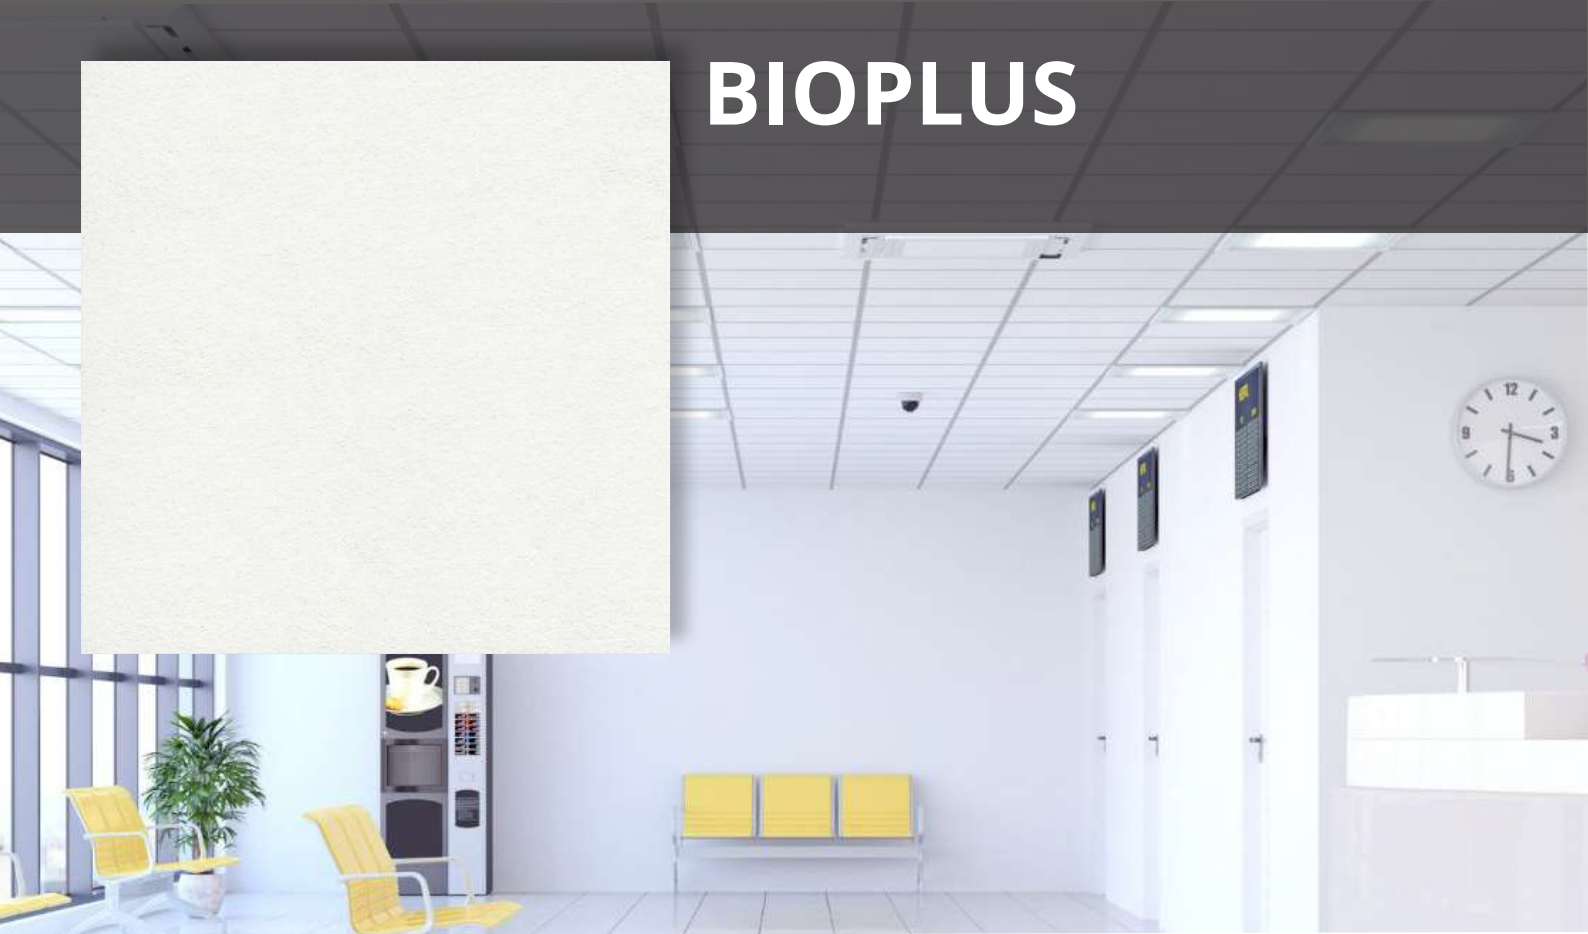

TECHNICAL DATA

Raw material

Wet formed slag fiber Anti-microbial performance provides protection against bio-contamination

Size

600mm x 600 mm
2ft x 2ft | 2ft x 4ft

Thickness

15mm

Color

White

Light Reflectance

0.86

Sound Absorption


Up to 0.5

Sound Attenuation

N/A

Moisture Resistance

Up to RH 95

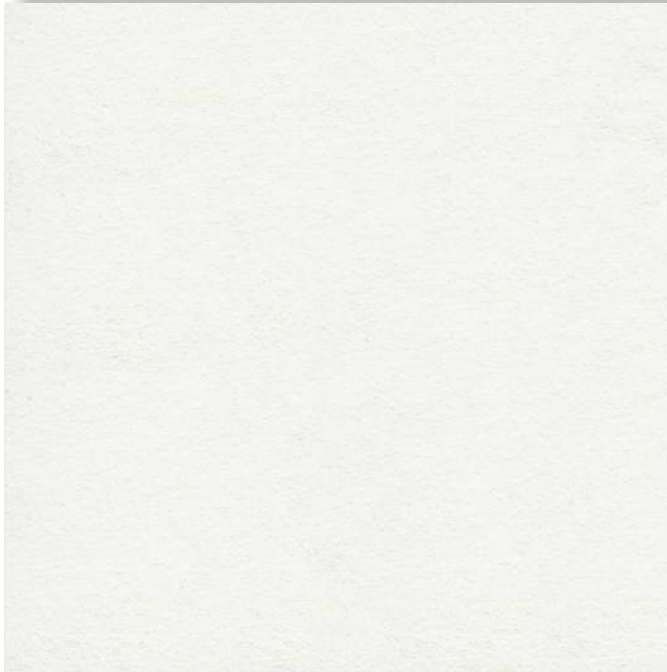

Application Area:

Interior of commercial building:

- Offices
- Classrooms
- Hospitals
- Cinemas
- Church
- Gym
- Mall
- Theaters


Storage:

Store the tiles in a dry place on pallets.


Installation:

Make sure to install carefully with gloves.


EXPOSED SYSTEM

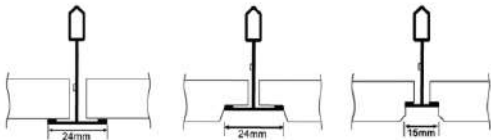

CONCEALED SYSTEM




EXPOSED SYSTEM

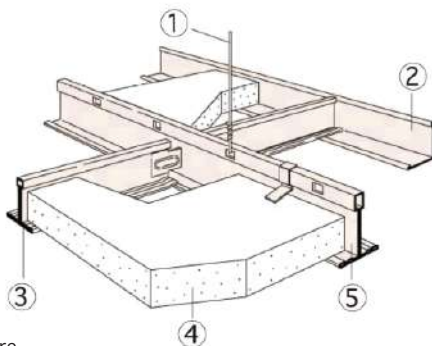

- 1 - hanger wire
- 2 - wall molding
- 3 - cross t-bar
- 4 - square tile
- 5 - main t-bar

OPEN-TYPE CONCEALED SYSTEM

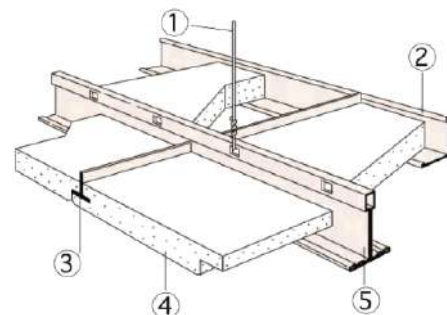

- 1 - hanger wire
- 2 - wall molding
- 3 - cross t-bar
- 4 - open-type concealed tile
- 5 - main t-bar