



# OPTIMAL

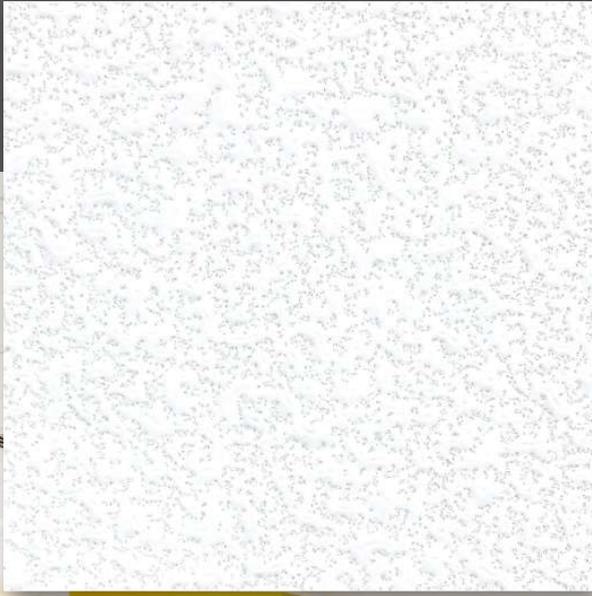

## TECHNICAL DATA

<b>Raw material</b>	Glass fiber laminated with acoustic tissue
<b>Surface Finish</b>	Factory-applied vinyl latex paint
<b>Size</b>	600mm x 600 mm 2ft x 2ft   2ft x 4ft
<b>Thickness</b>	15mm, 20mm
<b>Color</b>	White
<b>Light Reflectance</b>	0.90
<b>Sound Absorption</b>	Up to 0.90-0.95
<b>Sound Attenuation</b>	35 dB
<b>Moisture Resistance</b>	Up to RH 99

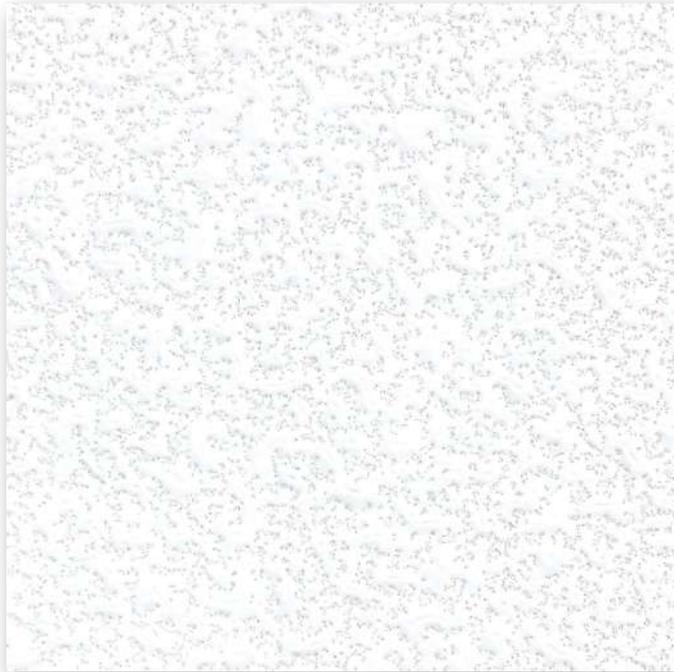

## Application Area:

Interior of commercial building:

- Offices
- Classrooms
- Hospitals
- Cinemas
- Church
- Gym
- Mall
- Theaters


## Storage:

Store the tiles in a dry place on pallets.


## Installation:

Make sure to install carefully with gloves.


### EXPOSED SYSTEM

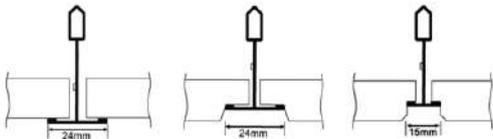

### CONCEALED SYSTEM




### EXPOSED SYSTEM

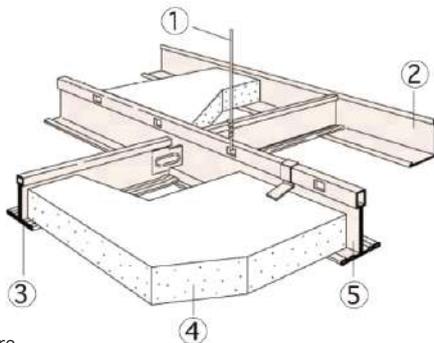

- 1 - hanger wire
- 2 - wall molding
- 3 - cross t-bar
- 4 - square tile
- 5 - main t-bar

### OPEN-TYPE CONCEALED SYSTEM

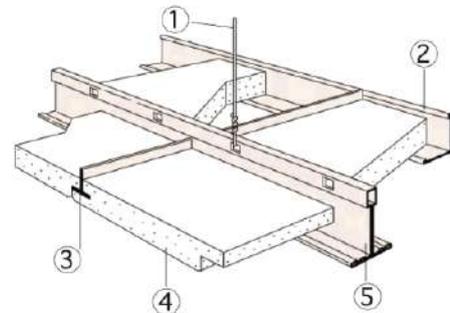

- 1 - hanger wire
- 2 - wall molding
- 3 - cross t-bar
- 4 - open-type concealed tile
- 5 - main t-bar