

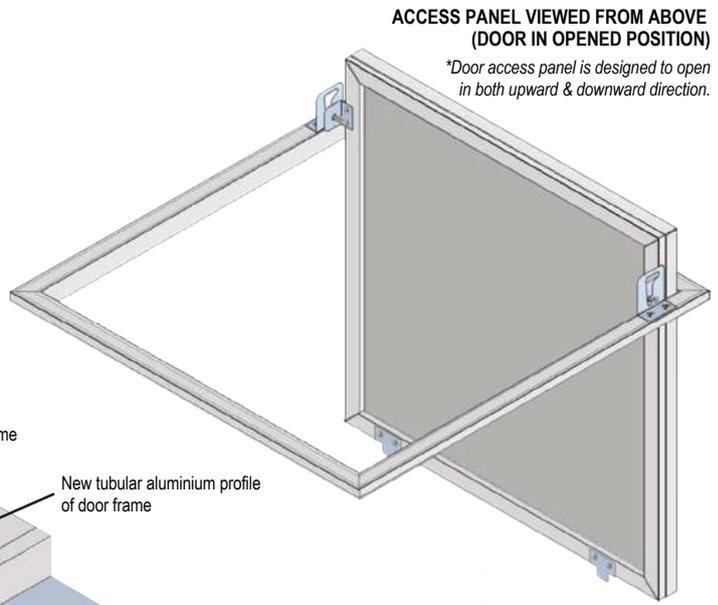
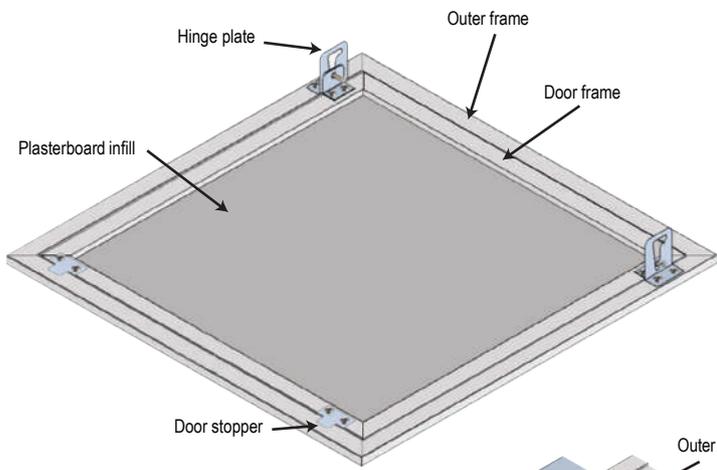


## NEW A-SERIES ACCESS PANEL

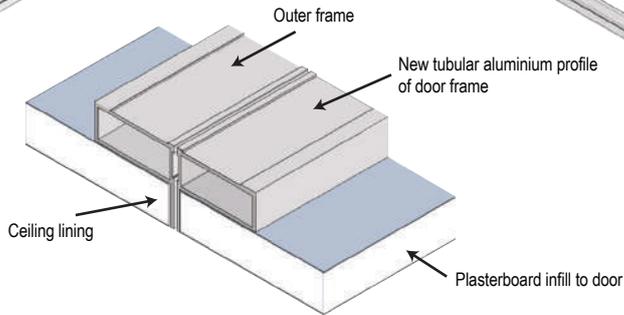

### Drywall screw



### STANDARD SIZES:

300mm x 300mm
450mm x 450mm
600mm x 600mm

\*Custom-made sizes and locks available upon request.

### The benefits of the new improved TECHNO A-Series Access Panel:



New tubular aluminium profile provides a much robust frame.



More resistance to distortion especially in transit without the plasterboard infill.



The new profile will allow the panels to be better stacked and more stable for delivery.




The new access panel design looks neater with lesser exposed components.




The points of the screws securing the plasterboard infill to door frame are concealed within the profile. Screw protectors are no longer required. Hence, the time taken to fix the board to the door will be quicker and easier to handle.

### Actual Aluminium Profile


Aluminium profile (Door frame)




Plasterboard infill to door




## CORNER BEADS

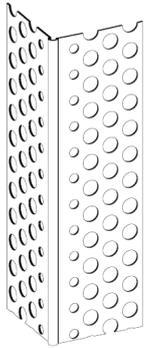


**Description:** Perforated Corner Bead  
**Part No:** T01  
**Thickness:** 0.35 mm (base metal thickness)  
**Steel Grad:** G300  
*Min. Yield Strength - 300 MPa*  
*Min. Tensile Strength - 340 MPa*

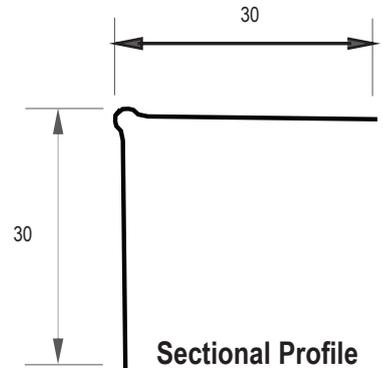


**Metallic Coating:** Zinc Aluminium Alloy AZ150  
**Standard Product Length:** 3000 mm (other lengths available on request)

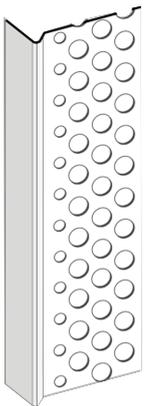


**Description:** Plaster Stopping Angle 10 mm  
**Part No.:** T25  
**Thickness:** 0.35 mm (base metal thickness)  
**Steel Grade:** G300  
*Min. Yield Strength - 300 MPa*  
*Min. Tensile Strength - 340 MPa*

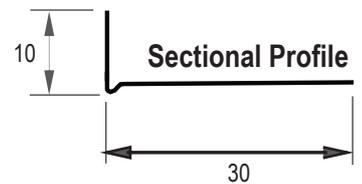

**Metallic Coating:** Zinc Aluminium Alloy AZ150  
**Standard Product Length:** 3000 mm (other lengths available on request)

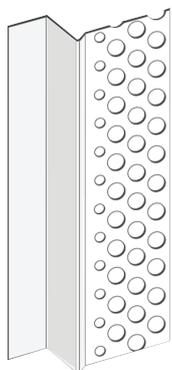

**Description:** Shadowline Stopping Angle 10mm x 10 mm  
**Part No.:** T50 -1010  
**Thickness:** 0.35 mm (base metal thickness)  
**Steel Grade:** G300  
*Min. Yield Strength - 300 MPa*  
*Min. Tensile Strength - 340 MPa*

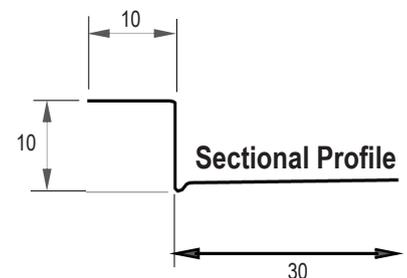

**Metallic Coating:** Zinc Aluminium Alloy AZ150  
**Standard Product Length:** 3000 mm (other lengths available on request)

